

HDMI Distribution Amplifier



(HS-2212F)
1 In 2 Out



(HS-2214F)
1 In 4 Out



(HS-2218F)
1 In 8 Out

USER MANUAL HS-2212F / HS-2214F / HS-2218F

Package Contents-

- 1 AVLINK HS-2212F or HS-2214F or HS-2218F HDMI Distribution Amplifier
- 1 user manual
- 1 power adapter DC 9V 1A for HS-2212F, HS-2214F or 1 AC power cord for HS-2218F
- 2 rack rails, 8 screws for HS-2214F only
- 2 rack rails, 6 screws for HS-2218F only

Anything missed, please contact with your vendor.

Introduction

Through the HDMI Distribution Amplifier, you can use one DVD player/TV receiver to display identical image on 2,4,8 projectors or HDTV by HDMI port.

HDMI Distribution Amplifier is ideal for:

- Test bench facilities
- Data Center
- Help desks


Features

- Use Panellink digital technology.
- Compliant with the specification of HDMI 1.2.
- Support high-resolution display up to UXGA, 480p, 480i, 720p, 1080i, 1080p.
- Can be cascaded.
- 1U rack design for HS-2214F, HS-2218F.

Specifications

Function	HS-2212F	HS-2214F	HS-2218F
HDMI Input Connector (A-Type Female)	1		
HDMI Output Connector (A-Type Female)	2	4	8
Max. Resolution	UXGA, 1080p		
Cable Distance (Device to Monitor)	10 m (Max.)		
Signal Type	Standard HDMI Signal		
Power Adapter (Min.)	DC 9V 1A	AC 100~240V	
Housing	Metal		
Weight	620 g	975 g	2530 g
Dimensions (LxWxH) mm	200x75x45	269x104x45	440x185x45

Technical Specifications Input/Output Signal

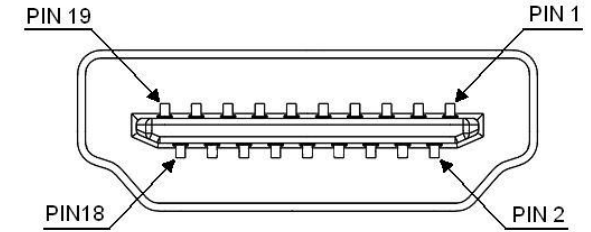

Pin #	Signal	Pin #	Signal
1	TMDS Data 2+	11	TMDS Clock Shield
2	TMDS Data 2 Shield	12	TMDS Clock -
3	TMDS Data 2-	13	CEC
4	TMDS Data 1+	14	Reserved (N.C. on device)
5	TMDS Data 1 Shield	15	SCL
6	TMDS Data 1-	16	SDA
7	TMDS Data 0+	17	DDC/CEC Ground
8	TMDS Data 0 Shield	18	+5 Power
9	TMDS Data 0-	19	Hot Plug Detect
10	TMDS Clock+		

FRONT VIEW



1. Power LED

REAR VIEW



1. Input Power Jack
2. "HDMI In" Port
3. "HDMI Out" Port

*There are 2/4/8 out ports for HS-2212F / HS-2214F / HS-2218F.

Installation

1. Turn off the DVD player/TV receiver and monitors.
2. Connect the HDMI male extension cable between the DVD player/TV receiver and the “HDMI In” port of Distribution Amplifier.
3. Connect the HDMI male/female extension cables between the monitors and the “HDMI Out” ports of Distribution Amplifier.
4. Connect the power cord and turn on the Distribution Amplifier.
5. Turn on the DVD player/TV receiver and monitors.

Note:


- Have to install all TVs with the same resolution limited.
- We suggest user connect TV from “HDMI Out 1” first. Because Distribution Amplifier will simulation EDID from “HDMI Out 1”.

Operation for cascade:

1. The function to display identical image on more monitors, you have to attach another Distribution Amplifier.
2. Connect the HDMI male/female extension cable between the former Distribution Amplifier of the “HDMI Out 1” port and the latter Distribution Amplifier of the “HDMI In” port.

Note:

Even though you are allowed to cascade the Distribution Amplifier with varied ports, the image might become unstable if cascade too many tiers of Distribution Amplifier.

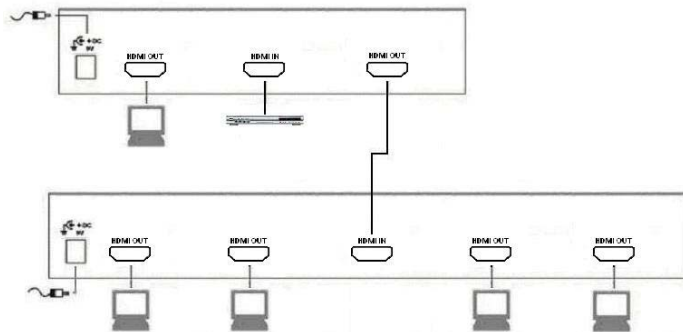

P.S.: The example cascades the 2 and 4 ports Distribution Amplifier; however, you can cascade the HDMI Distribution Amplifier with demanded port.

© C&C TECHNIC TAIWAN CO., LTD. All rights reserved.

Trademarks:

All the companies, brand names, and product names referred to this manual are the trademarks or registered trademarks belonging to their respective companies.