


Table:

P/N	ITEM NO.	LENGTH(X)
	K13130130060M-03	1800±30
	K13130130100M-03	3000±50
	K13130130197M-03	6000±80
	K13130130328M-03	10000±100

TOLERANCE : ANGLES : ±2° X. ±0.2 X.X ±0.1 X.XX ±0.05 DO NOT SCALE DRAWING		TITLE <b>QYM</b>	
DRAWN BY	CHECKED BY	APPROVED BY	DWG NO.
SIZE A	UNIT MM	SCALE 0.95 : 1	ITEM NO.
PART NO. <b>CM CABLE</b>		REV. A	DATE 02/15/2005
THIRD ANGLE PROJECTION		FACE 1 OF 2	

PIN ASSIGNMENT :

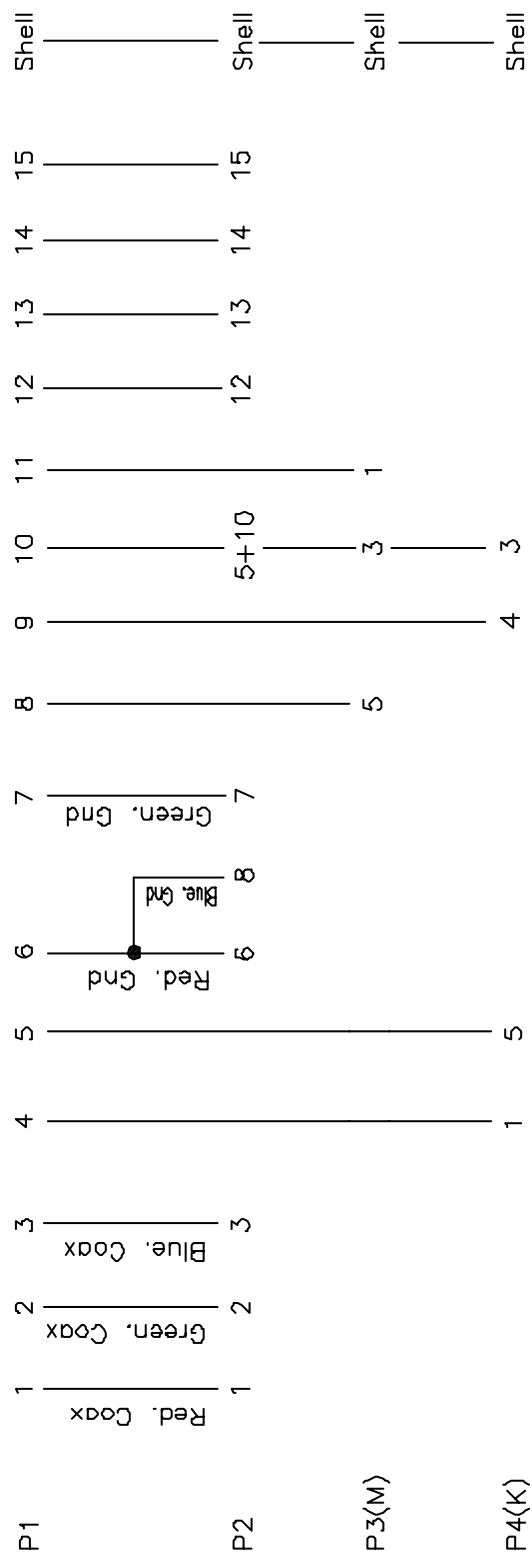

9	2	EA	MS044040480NIP0001	#4-40 4*48mm Thumbscrew Mold Color:Black(BK01)	12	KG	DVIND40BU008	Over Molded PVC Color:(BU08)Blue(661C).	
8	MM	SFC3010001		Copper Foil 360° Soldered.				HDDB15 Male Contact: Gold Flash Shell:	
7	1	EA	W227602BK3CJF000XM01	UL20276 {32AWG*3Coax(1C+D+A)/Mylar)+30AWG*7C+A/Mylar+Drain+Braid} (30AWG*6C+A)/Mylar+Drain)*ZF OD:3*5.5*3mm Color: Black(BK01)	11	EA	CHDDB015MBKNIT000002	Nickel Plated Insulation: Black	
6	2	EA	MS044040410NIP0001	#4-40 4*41 Thumbscrew Mold Color:(661C)Blue(BU08)	10	EA	CMINI006MPUNIT000002	MD6 Male Contact: Gold Flash Shell: Nickel Plated Insulation: Purple	
5	KG	DVINO40PU004		Outer Molded PVC, Color: (PU04)Purple(Pantone 2715C)	UNLESS OTHERWISE SPECIFIED TOLERANCE : ANGLES : ±2° X.X ±0.2 X.XX ±0.1 X.XX ±0.08 DO NOT SCALE DRAWING				
4	KG	DVINO40GN008		Outer Molded PVC, Color: (GN08)Green(Pantone 3395C)	TITLE				
3	KG	DVINO40BK001		Outer Molded PVC, Color: Black(BK01)	CM CABLE				
2	1	EA	CHDDB015MBUNIT000014	HDDB15 Male Contact: Gold Flash Shell: Nickel Plated Void Pos 9Pin Insulation: Blue	DRAWN BY	QYM		REV. A	
1	1	EA	CMINI006MGNNIT000002	MD6 Male Contact: Gold Flash Shell: Nickel Plated Insulation: Green	CHECKED BY	UNIT	MM	PART NO.	
ITEM	QTY	U/M	PART NO.	DESCRIPTION	APPROVED BY	SCALE	0.95 : 1	THIRD ANGLE PROJECTION	FACE 2 OF 2
					DWG NO.	DATE	02/15/2005		