


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

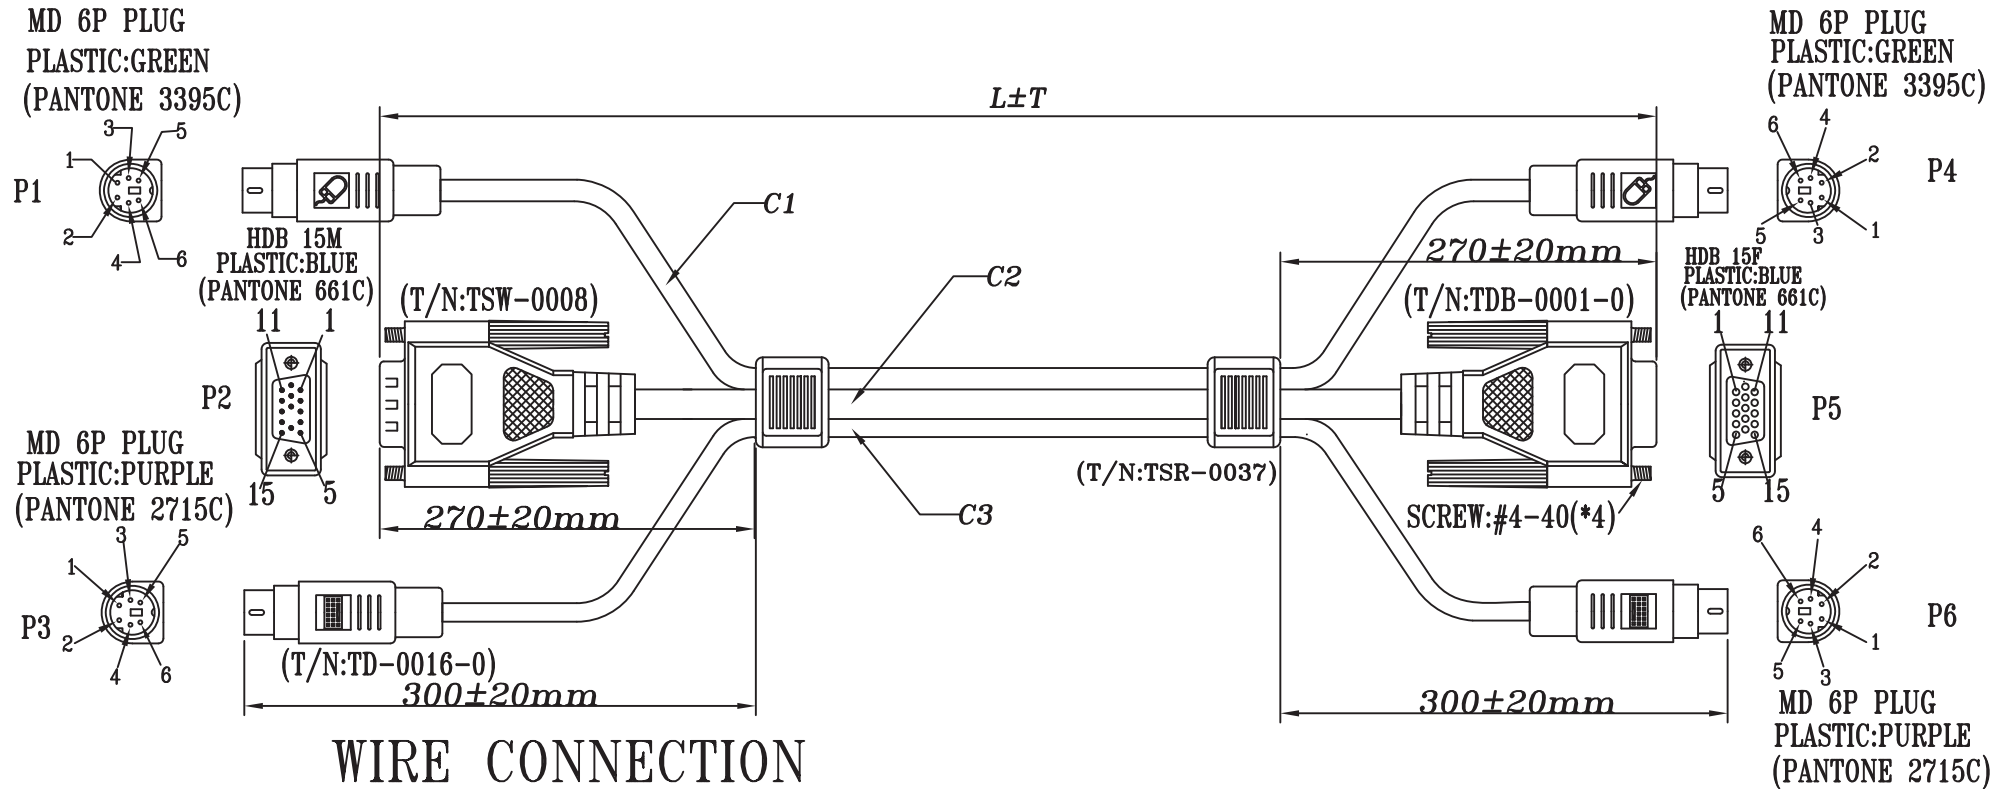

WIRE CONNECTION

P2	COLOR	P5	P1	COLOR	P4	P3	COLOR	P6
1	RED COAX	1	1	YELLOW	1	1	PURPLE	1
2	GREEN COAX	2	2	GREEN	2	2	GRAY	2
3	BLUE COAX	3	3	BLACK	3	3	RED	3
4	BLACK	4	4	BROWN	4	4	ORANGE	4
6	RED SPIRAL	6	5	BLUE	5	5	WHITE	5
7	GREEN SPIRAL	7	6	PINK	6	6	LIGHT GREEN	6
8	BLUE SPIRAL	8	SHELL	DRAIN	SHELL	SHELL	DRAIN	SHELL
5		5						
10	BROWN	10						
11	WHITE	11						
12	ORANGE	12						
13	YELLOW	13						
14	GREEN	14						
15	BLUE	15						
SHELL	BRAID	SHELL						

Tolerance Inch M/M			2direct GmbH				
. X	.015	.30	Title HDB 15M+MD 6M*2/ HDB 15F+MD6M*2 CABLE				
. XX	.010	.10					
. XXX	.005	.05					
Draw VITA 01/23/07'			Customer P/N				
Chek			App'd		Customer		
Engr			Scale	NONE	Units	M/M	Third Angle Projection
			Dwg No.120-2753		Rev. A	Sheet:1/3	

LTR	REV.	DESCRIPTION	DATE

REMARK:

1.COMBINED CABLE:TOTAL CABLE OD:3.5*5.0*3.5mm

C1 & C3:UL 20276 30AWG(7/0.103 T.C)*6C+DRAIN WIRE+AL/MY
PVC JACKET OD:3.5±0.15mm COLOR:DARK GRAY(RAL 7021)

C2:UL 20276 [30AWG(7/0.103 T.C)+DRAIN WIRE(7/0.12 T.C)+AL/MY+MY]*3C
+30AWG(7/0.103 T.C)*7C+AL/MY+DRAIN WIRE(7/0.12 T.C)
+BRAID(16/6/0.12 MAGNALIUM), PVC JACKT
OD:5.0±0.15mm COLOR:DARK GRAY(RAL 7021)

2.CONNECTOR:

P1&P4:MD6P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL, PLASTIC COLOR:GREEN(3395C)

P3&P6:MD6P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL, PLASTIC COLOR:PURPLE(2715C)

P2: HDB 15P MALE GOLD FLASH CONTACT; NICKEL PLATED SHELL 9TH PIN IS EMPTY COLOR:BLUE(661C)

P5: HDB 15P FEMALE GOLD FLASH CONTACT; NICKEL PLATED SHEL COLOR:BLUE(661C)

3.SHIELD:P2&P5 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID

4.HOOD: P1&P4:MOLDED TYPE PVC 45P COLOR:GREEN(PANTONE 3395C)

P3&P6:MOLDED TYPE PVC 45P COLOR:PURPLE(PANTONE 2715C)

P2&P5:MOLDED TYPE PVC 45P COLOR:BLUE(PANTONE 661C)


SR:MOLDED TYPE PVC 45P , COLOR:DARK GRAY(RAL 7021)

5.ELECTRIC TEST:

- (1).100% TEST OPEN SHORT&MIS WIRE
- (2).CONTACT RESISTANCE: 3 OHMS (MAX)
- (3).INSULATION RESISTANCE: 10M OHMS (MIN)







6.PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>EACH CARTON / ROHS LABEL(L*W=35*22mm)

120-2753-4	CK0006	4260113563861	5000	50
120-2753-3	CK0005	4260113563854	3000	30
120-2753-2	CK0004	4260113563847	2000	30
120-2753-1	CK0003	4260113563830	1500	30
DWG	P/N	EAN-CODE	L(mm)	T(mm)

Tolerance Inch M/M			2direct GmbH				
. X	.015	.30	Title HDB 15M+MD 6M*2/ HDB 15F+MD6M*2 CABLE				
. XX	.010	.10					
. XXX	.005	.05					
Draw VITA 01/23/07'			Customer P/N				
Chek			App'd		Customer		
Engr			Scale	NONE	Units	M/M	Third Angle Projection 
			Dwg No.120-2753		REV. A	Sheet:2/3	

LTR	REV.	DESCRIPTION	DATE

Polybag & Label Position

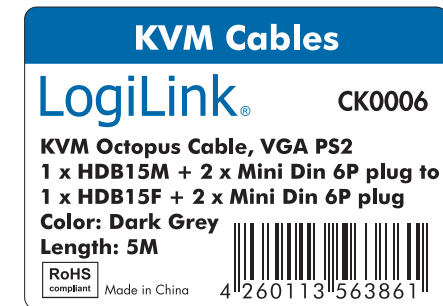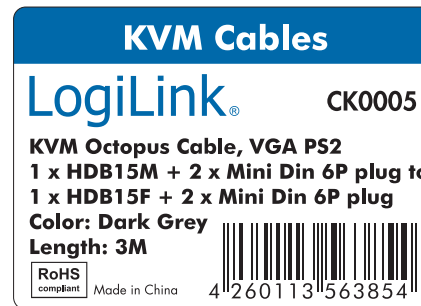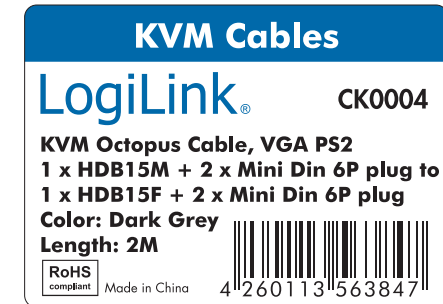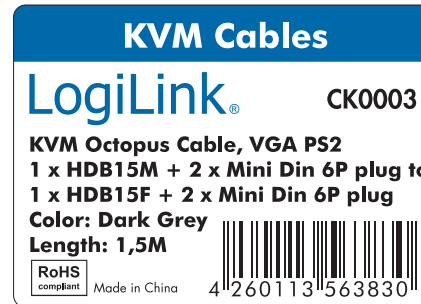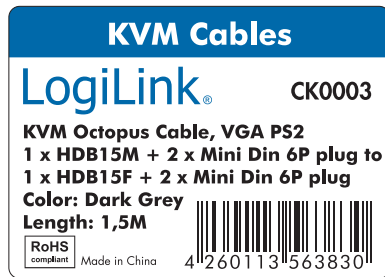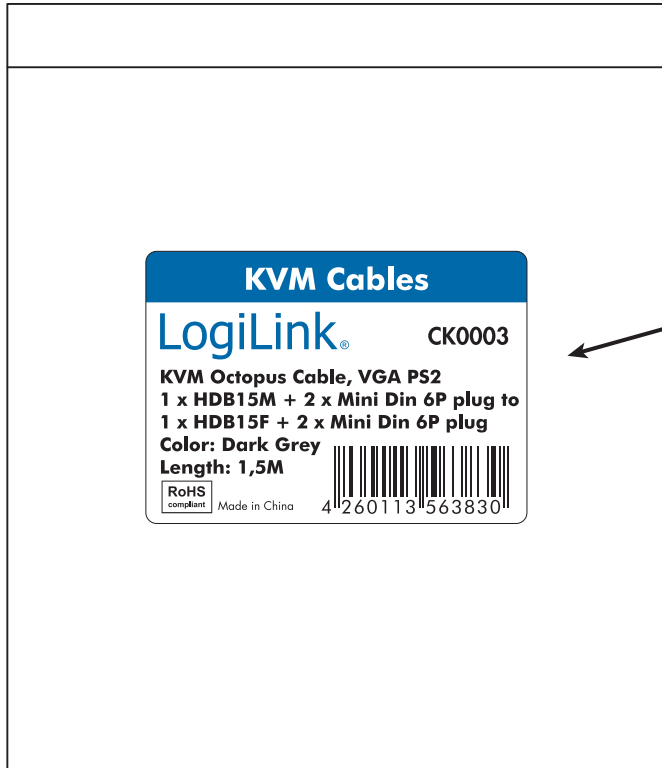

Pantone 2945C
Black
Size: 70 x 50 mm
R= 2mm

Tolerance Inch M/M			2direct GmbH				
. X	.015	.30	Title HDB 15M+MD 6M*2/ HDB 15F+MD6M*2 CABLE				
. XX	.010	.10	Customer P/N				
. XXX	.005	.05	App'd _____ Customer _____				
Draw VITA 01/23/07'			Scale	NONE	Units	M/M	Third Angle Projection
Chek			Dwg No.120-2753 REV.A Sheet:3/3				
Engr							