

Model: **CL-1200**
Slideaway Console



15" or 17"



CL-1200 Rear View

The CL-1200 is a KVM console module featuring an integrated 15" or 17" LCD panel, full keyboard, and touchpad in a 1U, rack-mountable, Slideaway housing. It was developed in response to the enormous popularity of the Slideaway console found on the CL-1208 and CL-1216 KVM switches. The CL-1208 / CL-1216 models are made up of two major modules: the front-end Slideaway KVM Console module, and the back-end KVM Switch module.

The CL-1200 is similar to the front-end Console module found on the CL-1208 / CL-1216. Its purpose is to serve as the front end Slideaway console for standard Master View KVM switches.


Features

- Integrated KVM console featuring a 15" or 17" LCD monitor in Slideaway housing
- Dual consoles- simultaneous viewing and control or select one or the other via OSD
- 105-key keyboard
- Compatible with ATEN KVM Switches and servers
- Internal power built in
- Less than 1 U high mountable rack
- Adjustable depth to fit within the rack
- DDC emulation of the LCD monitor - VGA settings of every connected computer are automatically adjusted for optimal output to the LCD monitor
- Improved design Easy Rack Mounting-Single person installation (Optional)

Specifications

| | | | |
|-------------------------|-----------------------|--------------------------|--------------------------------|
| Function | | CL-1200 | |
| Computer Port Selection | | Push Button, Hotkey, OSD | |
| Connectors | Second Console | Keyboard | 1 x Mini Din 6 Female (Purple) |
| | | Video | 1 x HDB15 Female (Blue) |
| | | Mouse | 1 X Mini Din 6 Female (Green) |
| | Computer | Keyboard/Video/Mouse | 1 x SPHD-15 Female |
| Power | | 3 Prong AC Socket | |
| Switches | Firmware Upgrade | | 1 x Slide |
| | LCM Adjustment | | 4 x Buttons |
| | KM Reset | | 1 x Semi-recessed Push Button |
| | Power | | 1 x Rocker Switch |
| LEDs | Power | | 1 (Blue) |
| | Num Lock | | 1 (Green) |
| | Caps Lock | | 1 (Green) |
| | Scroll Lock | | 1 (Green) |
| Emulation | Keyboard | | PS/2 |
| | Mouse | | PS/2 |
| Video | 15" LCD | | 1024 x 768; DDC2B |
| | 17" LCD | | 1280 x 1024; DDC2B |
| Power Consumption | 15" LCD | | 120V, 16W / 230V, 19W |
| | 17" LCD | | 120V, 27W / 230V, 35W |
| Environment | Operating Temperature | | 0°~50° C |
| | Storage Temperature | | -20°~60° C |
| | Humidity | | 0~80% RH, NC |
| Physical Properties | Housing | | Metal |
| | Weight | 15" LCD | 13.2 kg |
| | | 17" LCD | 13.7 kg |
| Dimensions (D x W x H) | | 52 x 48 x 4.4 cm | |

Diagram

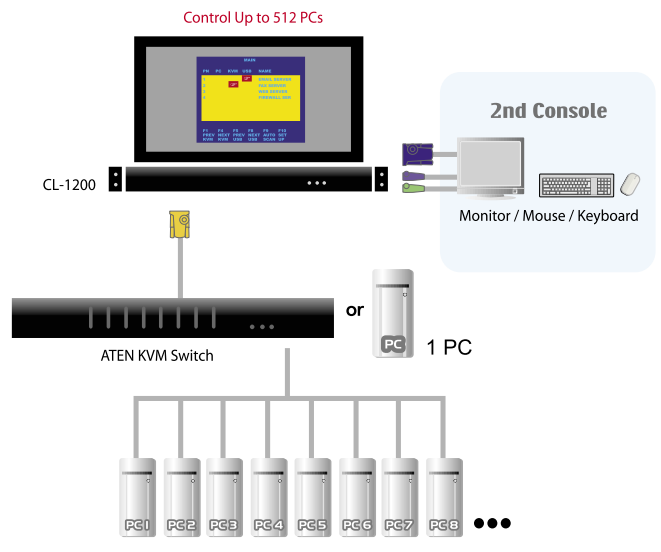

Accessories



- 1.8m PS/2 KVM Cable x 1 (pic.1)
- Power Cord x 1 (pic.2)
- Rack Mounting Kit x 1 (pic.3)

Optional Equipment

- Optional rack mounting kit**
- Easy-Installation Rack Mounting Kit - Short
- Easy-Installation Rack Mounting Kit - Long

