

Model: **CS-9134**  
4 Port PS/2 KVM Switch

Model: **CS-9138**  
8 Port PS/2 KVM Switch



CS-9138 Rear View

Despite the CS-9134 and the CS-9138 (Compatible with PS/2 and USB\*) serving as cascade units for the CS-428 Multi-Console KVM Switch, they also function as capable units by themselves. A single Master View CS-9134 or CS-9138 can control up to 4 or 8 computers, respectively. Since units can be cascaded to three levels, in a full three stage installation, up to 21 CS-9134 Master Views can control up to 64 computers, and up to 73 CS-9138 Master Views can control up to 512 computers - all from a single console. There is no better way to save time and money than with a Master View CS-9134/CS-9138 installation.

\* USB operation requires purchase of optional equipment (see below).


## Features

- Cascadable to three levels - control up to 64 (CS-9134) or 512 (CS-9138) computers from a single console
- No software required - computer selection via front panel buttons, hotkeys, or On Screen Display (OSD)
- PS/2 and serial mouse emulation provided for system bootup console's PS/2 mouse controls all connected computers - even those with serial mice
- PS/2 compatible mouse support - Microsoft Intellimouse Pro, Logitech FirstMouse, FirstMouse+
- Superior video quality; 1920x1440
- Rack mountable in a 19" (1U) system rack
- Available in silver and black


## Specifications

Function		CS-9134	CS-9138	
Computer Connections	Direct	4	8	
	Max	64 (Via Cascade)	512 (Via Cascade)	
Computer Port Selection		Hotkey Push button, OSD		
Connectors	Console	Keyboard	1 x Mini Din 6 Female (Purple)	
		Video	1 x HDB15 Female (Blue)	
		Mouse	1 x Mini Din 6 Female (Green)	
	Computer	Keyboard	4 x Mini Din 6 Female (Purple)	8 x Mini Din 6 Female (Purple)
		Video	4 x HDB15 Male (Blue)	8 x HDB15 Male (Blue)
		Mouse	4 x Mini Din 6 Female (Green)	8 x Mini Din 6 Female (Green)
Power		1 x DC Jack		
LEDs	On Line/ Selected	4 (Green)	8 (Green)	
	Power	4 (Orange)	8 (Orange)	
Emulation	Keyboard	PS/2		
	Mouse	PS/2		
Video		1920 x 1440; DDC2B		
Scan Interval		3, 5, 10, 15, 20, 30, 40, 60 Seconds		
Power Consumption		DC9V, 0.9W	DC9V, 1.08W	
Environment	Operating Temperature	0° ~50° C		
	Storage Temperature	-20° ~60° C		
	Humidity	0~80% RH, NC		
Physical Properties	Housing	Metal		
	Weight	2.55 kg	2.85 kg	
	Dimensions (L x W x H)	45 x 17 x 6.7 cm		

## Diagram

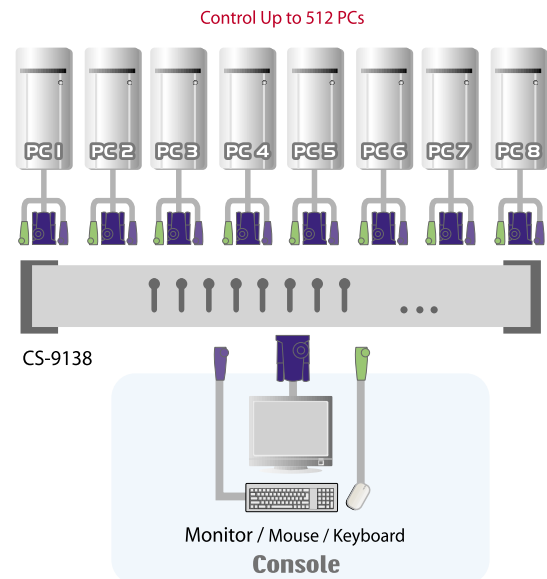

## Accessories

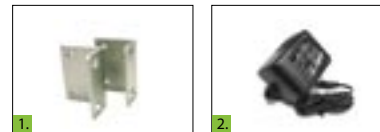

Rack Mounting Kit x 1 (pic.1)  
Power Adapter: DC9V x 1 (pic.2)

## Optional Equipment

- **PS/2 KVM Cable:**  
We offer varying lengths: 1.2m (2L-5001 P/C), or 1.8m (2L-5002 P/C) 3m (2L-5003 P/C) and 5m (2L-5005 P/C) PS/2 KVM cable, please refer to page P64-A
- **Cables & Converters for USB interface support:**
  1. **PC compatible:** a 1.8m (2L-5502UP), 3m (2L5503UP) and 6m (2L-5506UP) USB KVM cable, please refer to page P64-G
  2. **Windows/Mac compatible:** UC-100 KMA (PS/2 to USB Adapter), please refer to page P33
  3. **Sun (USB) :** CV-131A, see page P34, **SUN (Legacy):** CV-130A, see page P33

